

**WERIT**


## Specification

for Material-No.: 210-BA2FATB6

Status: 25.09.2020

**Description: TOPline** UN IBC 1000 I, plastic skid pallet with 10 clamps, integrated valve DN50 (2" inch) EPDM gasket, top lid DN225 gasket EPDM, natural colored IB, 16 vertical bars, label plate on front

### Exposure

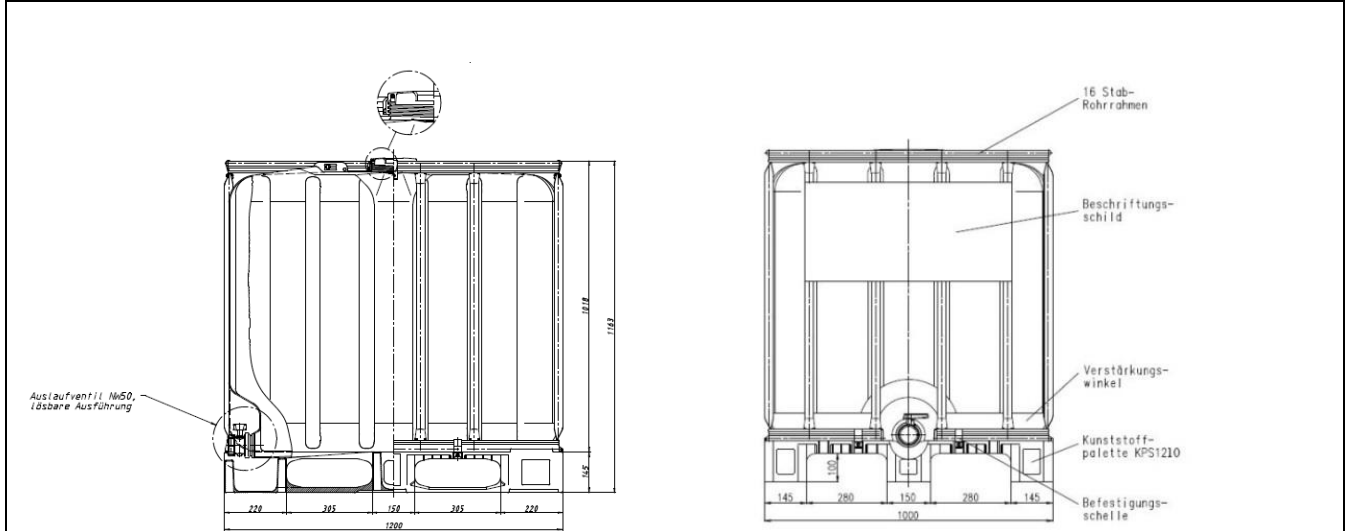

<b>Dimensions (mm):</b>	<b>Measures</b>	<b>Tolerances</b>
Length external	1.200 mm	+ 5 mm / - 5 mm
Width external	1.000 mm	+ 5 mm / - 5 mm
Height external	1.165 mm	+ 5 mm / - 5 mm
Entry height min.	90 mm	
Length label plate front	722 mm	
Width label plate front	390 mm	
<b>Capacity:</b>		
Brimful capacity min.	1060 l	
Capacity min.	1000 l	

<b>Model:</b>	
Cage:	16 vertical bars, 10 clamps, 4 corner protectors
Filling opening:	Filling opening (top lid) DN 225 with S 240 x 12 internal thread (PE-HD), sealable; colour: red; EPDM gasket,
Pressure balance:	-
Discharge:	Piston valve DN 50 (2"inch) screwed valve with S 60 x 6 outer thread, colour: natural; valve gasket: EPDM; tamper evident aluminum seal welded on the outlet side; colour handle PP: red, sealing handle: EPDM Screw cap DN 50 - black, sealable (PE-HD) with S 60 x 6 internal thread; Safety pin - colour: yellow ,
Pallet:	4-way entry runner plastic pallet KPS, 1200 x 1000 mm, colour: black, with integrated steel reinforcement ,weight (kg): 15,1 kg +0,3 / -0,3
Weight:	Total 57,0 +- 5,0%
Specialities:	None

**WERIT****Specification**

for Material-No.: 210-BA2FATB6

**Status: 25.09.2020**

<b>Material:</b>	
Frame:	Horizontal and vertical welded steel tubes inside and outside galvanized Rectangular steel cage is screwed on the pallet with galvanized clamps and screws ,4 Cross bars: steel tubes inside and outside galvanized Cross bars fixed with galvanized screws to horizontal top frame. Weight (kg): approx. 21,5
Bottle:	PE - HD, natural coloured, UV-stabilized, Weight (kg): 17,0 + 2% - 0
Filling lid:	HDPE Colour: red
Lid gasket:	EPDM
Screw cap valve:	HDPE Colour: black
Screw cap gasket:	Alveolit
Bung /seal cap:	-
Valve body:	HDPE
Valve plate:	HDPE
Gasket valve plate:	PE-CP
Handle:	PP, colour red
Handle gasket:	EPDM
Corner protectors:	HDPE black
Alu-seal:	BaCo Seal PE-Coat SY 6.4
Accessories:	Outlet pipe elbow NW 50 with S 60 x 6 internal thread and S 60x6 external thread, fixed on every IBC.
<b>Marking:</b>	None
<b>Signing:</b>	Label plate front with sticker PackOne, barcode with batch number,
<b>UN- certification</b>	31-HA1/Y D/BAM 12862